

HVR-1500

Digital HD Videocassette Recorder
Preliminary

SONY®

HDV™

Bringing a New Level of Functionality and Robustness to HDV Productions – the HVR-1500 HDV Recorder

The HVR-1500 is an HDV™ source feeder/recorder*¹ positioned at the top of the Sony HDV Series.

Inheriting the design concept of the market-acclaimed DSR-1500A, the HVR-1500 offers convenient features that professional users demand, such as quick mechanical response, multi-format DV playback, and a rich set of professional video/audio interfaces ranging from analog to digital SDI and AES/EBU. The HVR-1500 also offers HD-SDI output and RS-422A control capabilities, bridging HDV source footage and assets with high-end HD formats and HD editing equipment.

The HVR-1500 can also be used as a standard definition DVCAM™ recorder, in which case the same editing features as the DSR-1500A are offered.

The HVR-1500 is certainly the HDV recorder of choice for environments where robustness and functionality are prime concerns.



Simulated Image

MAIN FEATURES

Switchable Recording and Playback

The HVR-1500 offers recording and playback of various 60i/50i DV formats:

Recording Formats

- HDV 1080i, DVCAM, DV (SP mode)

Playback Formats

- HDV 1080i, DVCAM, DV (SP mode), DVCPRO™ 25

The recording time is a long 276 minutes for the HDV 1080i and DV formats, and 184 minutes for the DVCAM format using the PHDV-276DM DigitalMaster™ standard cassette tape.

A Full Range of Professional Interfaces

The HVR-1500 is a very versatile unit equipped with a variety of interfaces from analog to digital:

Standard Interfaces

- i.LINK™*² interface 6-pin (HDV 1080i/DV switchable)
- Analog video/audio output for HD/SD component, SD composite, S-Video
- HD-SDI output, SD-SDI input/output (both with embedded TC and audio)

Optional Interfaces

- Analog video/audio input for SD component, SD composite, S-Video

Optional Boards

- Analog Input Board HVBK-1505 (SD component, SD composite, S-Video, analog audio input)

Down Conversion Capability

The HVR-1500's HDV 1080i playback signal can be down-converted to 480i and output from the i.LINK, SD-SDI, and analog video interfaces with display modes selectable between Squeeze and Edge Crop.

RS-422A Control

2.7-inch (Viewable area, measured diagonally) LCD Monitor for Material Review and VTR Parameter Adjustment

Auto Repeat Function

HD and SD Reference Inputs


Reliable Operation With Tape/Head Cleaners, Robust Aluminum Diecast, and Direct Drive Reel Motors

*¹ In HDV mode, editing capabilities are not available.


*² i.LINK is a trademark of Sony used only to designate that a product contains an IEEE 1394 connector. Not all products with an i.LINK connector will necessarily communicate with each other. For information on compatibility, operating conditions, and proper connection, please refer to the documentation supplied with any device with an i.LINK connector. For information on devices that include an i.LINK connection, please contact your nearest Sony office.

APPLICATION EXAMPLES



HDV/HDCAM™ Linear Editing System

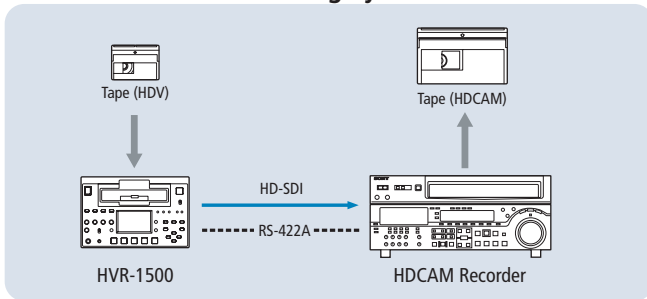

HDV/XDCAM™ HD Production System

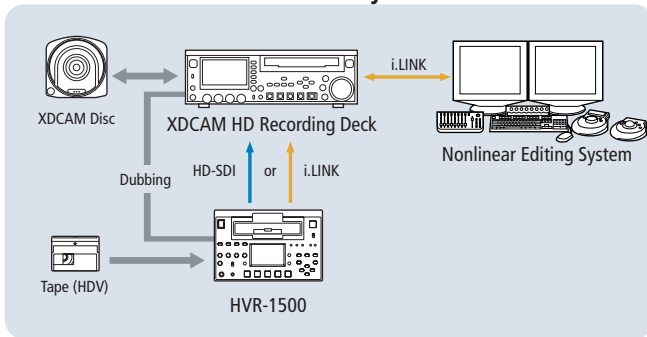

HD/SD Nonlinear Editing System

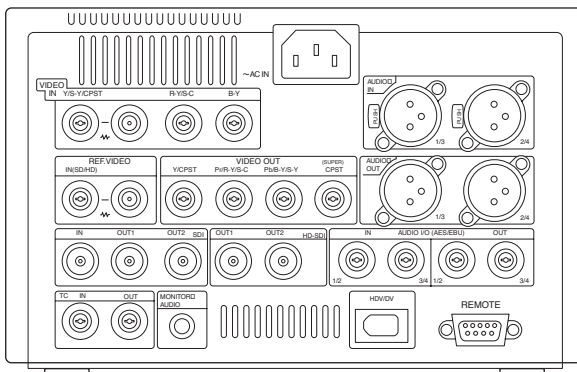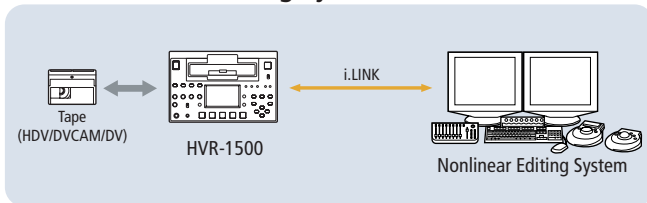

Rear Panel of the HVR-1500 (with the optional HVBK-1505 analog input board)

SPECIFICATIONS

		HVR-1500
Recording/Playback Performance		
Recording format	1080/60i, 1080/50i, 480/60i (NTSC), 576/50i (PAL)	
Playback & down conversion format	1080/60i, 1080/50i, 480/60i (NTSC), 576/50i (PAL)	
Tape speed	HDV/DV SP	18.831 mm/s (at system frequency 50Hz) 18.812 mm/s (at system frequency 59.94Hz)
	DVCAM	28.221 mm/s (at system frequency 50Hz) 28.193 mm/s (at system frequency 59.94Hz)
Playback/recording time	HDV/DV SP	Max. 276 min with PHDV-276DM cassette Max. 63 min with PHDVM-63DM cassette
	DVCAM	Max. 184 min with PDV-184ME cassette Max. 40 min with PDVM-40ME cassette
Fast forward/rewind time	Approx. 3 min with PHDV-276DM, PDV-184ME cassette	
Video Input		
Analog video	Ref. video (SD/HD)	BNC x1, BNC x1 loop-through
	Video ¹¹	BNC x4 ¹³ (Component /Composite with loop-through/S-Video BNC x2)
Digital video	SD-SDI BNC x1	
Audio Input		
Analog audio ¹¹	Audio XLR 3-pin female x2	
Digital audio	AES/EBU BNC x2	
Video Output		
Analog video	Component BNC x3 (SD/HD)/ Composite BNC x1/S-Video BNC x2 ¹³ Composite with Superimpose BNC x1	
	Digital video	SD-SDI BNC x2 HD-SDI BNC x2
Audio Output		
Analog audio	Audio XLR 3-pin male x2 Monitor RCA pin x1 Headphones JM-60 jack x1	
	Digital audio	AES/EBU BNC x2
i.LINK¹² Interface		
	i.LINK 6-pin x1	
Time Code Input/Output		
TC In	BNC x1	
TC Out	BNC x1	
Remote		
	RS-422A x1, Control-S (SIRCS) x1	
General		
Weight	Approx. 14 lb 8 oz (6.6 kg)	
Dimension (W x H x D)	8 3/8 x 5 1/8 x 16 5/8 inches (211(W) x 130 (H) x 420 (D) mm)	
Power requirement	AC 100 V to 240 V, 50/60 Hz	
Power consumption	Approx. 60 W	
Supplied Accessories		
	Operating instructions, AC cable	
Optional Accessory		
	HVBK-1505 Analog Input Board	

¹¹ The HVBK-1505 Analog Input Board is required.

¹² DV and HDV streams share the same i.LINK connector.

¹³ Selected via the menu.

SONY

Sony Electronics Inc.
1 Sony Drive
Park Ridge, NJ 07656
www.sony.com/HDV

V-2351
MK10371V1

© 2007 Sony Electronics Inc. All rights reserved.
Reproduction in whole or in part without permission is prohibited.
Features and specifications are subject to change without notice.

All non-metric weights and measurements are approximate.
Sony, DVCAM, i.LINK, DigitalMaster, HDCAM, XDCAM, and their respective logos are trademarks of Sony.
HDV and the HDV logo are trademarks of Sony Corporation and Victor Company of Japan, Limited.
DVCPRO is a trademark of Matsushita Electric Industrial Co., Ltd.